

APPLICATIONS
JAGUAR S-TYPE
2003-2006
JAGUAR X-TYPE
2002-2007


12.301147-01

KIT FEATURES


- DIN Radio Provision
with Removable Pocket

KIT COMPONENTS

A) Radio Housing B) Pocket

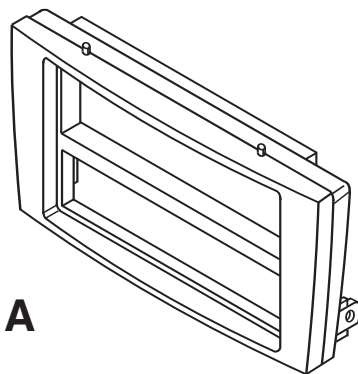

A

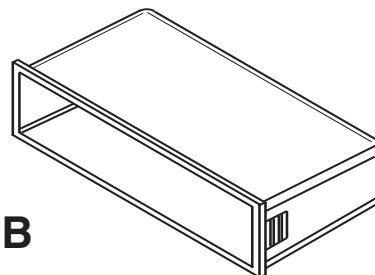

B

TOOLS REQUIRED:

Small Flat Blade Screwdriver/ Panel Removal Tool
• Torx Screwdriver • Socket Set




TABLE OF CONTENTS

Dash Disassembly

- Jaguar S-Type 2003-2006 1,2**
- Jaguar X-Type 2002-2007 3,4**

Kit Assembly

- DIN Radio Provision with Removable Pocket 5**

Final Assembly 6

***Note:**


Refer also to the instructions included with the aftermarket radio.

JAGUAR S-TYPE 2003-2006


- 1** Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2** Remove cup holder and (2) screws securing center console storage compartment and remove compartment. (Figure A)
- 3** Unclip and remove the trim panel around the shifter. (Figure B)

Continued on page 2

A

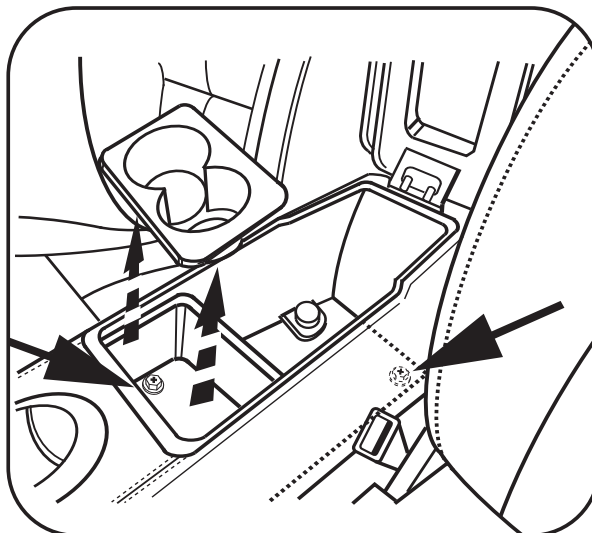



B

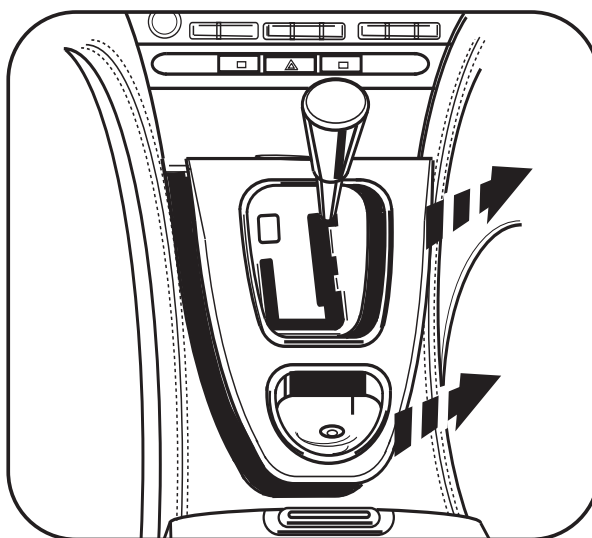

JAGUAR S-TYPE 2003-2006

- 4** Unclip and remove the trim panel surrounding the radio/climate controls/ashtray and front half of the center console. (Figure C)
- 5** Remove (4) screws securing the radio/climate control assembly to the dash. Unplug and remove assembly. (Figure D)
- 6** Remove (4) screws securing the radio to the assembly and remove the radio. Retain the assembly for re-use during kit assembly.

Continue to kit assembly

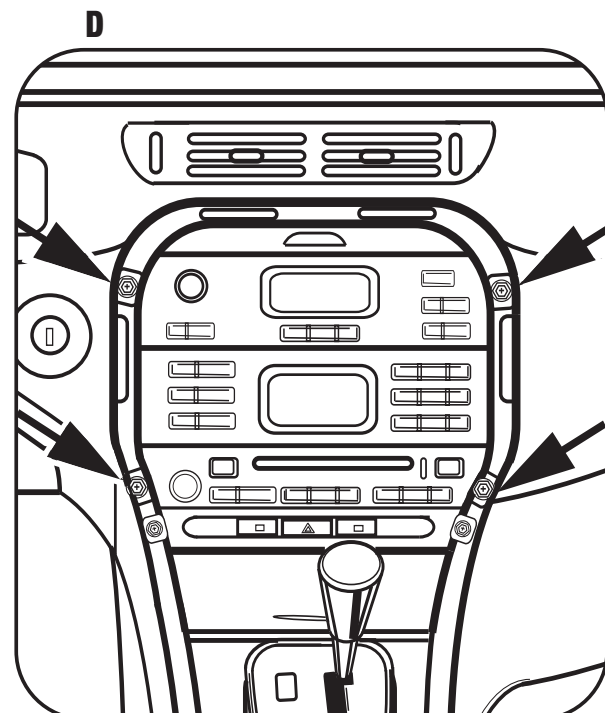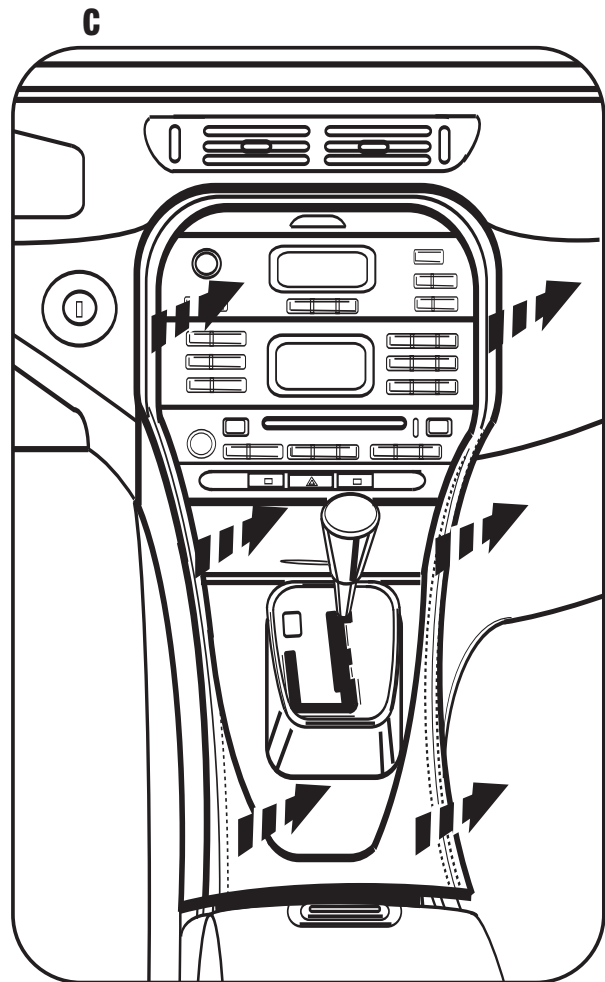


JAGUAR X-TYPE 2002-2007


- 1** Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2** Unclip and remove the trim panel around the shifter. (Figure A)
- 3** Remove (2) screws from bottom edge of ashtray assembly then unclip and remove ashtray assembly. (Figure B)
- 4** Remove (2) screws from inside ashtray cavity at bottom edge of radio. (Figure C)

Continued on page 4


A

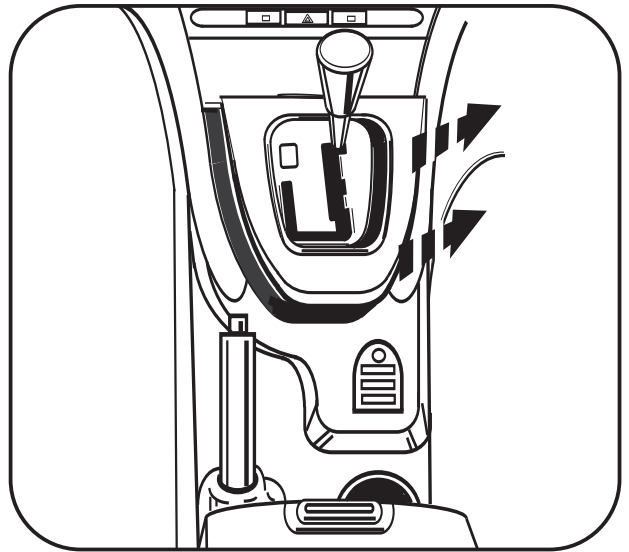

B

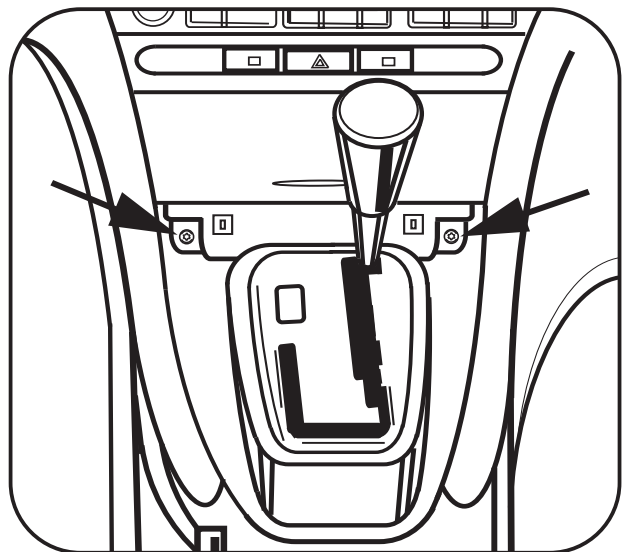




C

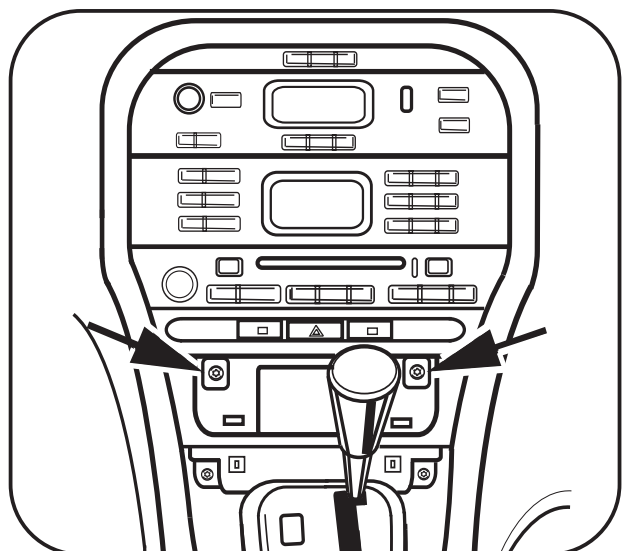

JAGUAR X-TYPE 2002-2007

- 5** Unclip, unplug and remove hazard switch/seat heater switch trim panel above climate control/radio assembly. (Figure D)
- 6** Remove (2) screws from inside switch panel cavity at top edge of climate controls. (Figure E)
- 7** Unplug and remove the climate control/radio assembly. (Figure F)
- 8** Remove (4) screws securing the radio to the assembly and remove the radio. Retain the assembly for re-use during kit assembly.

Continue to kit assembly

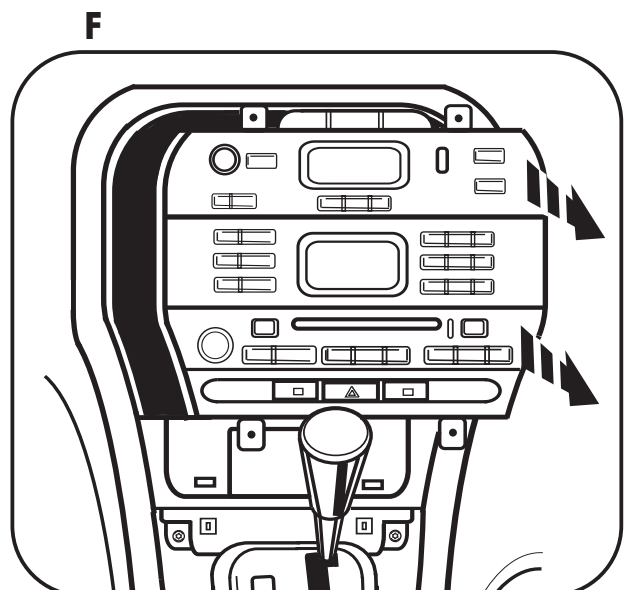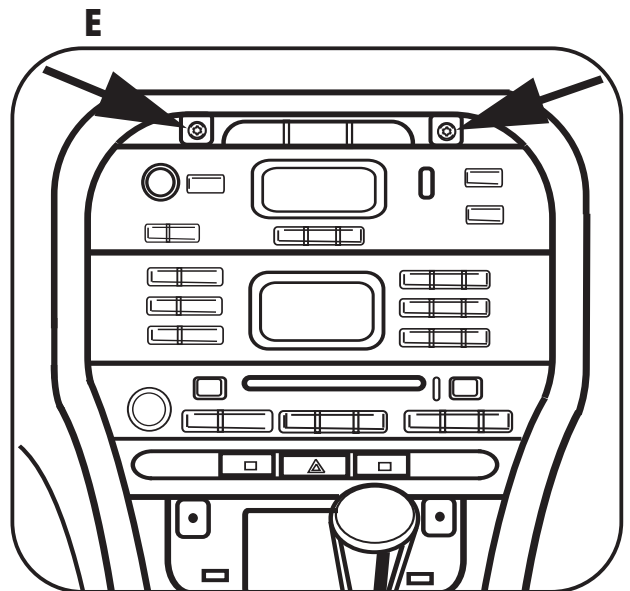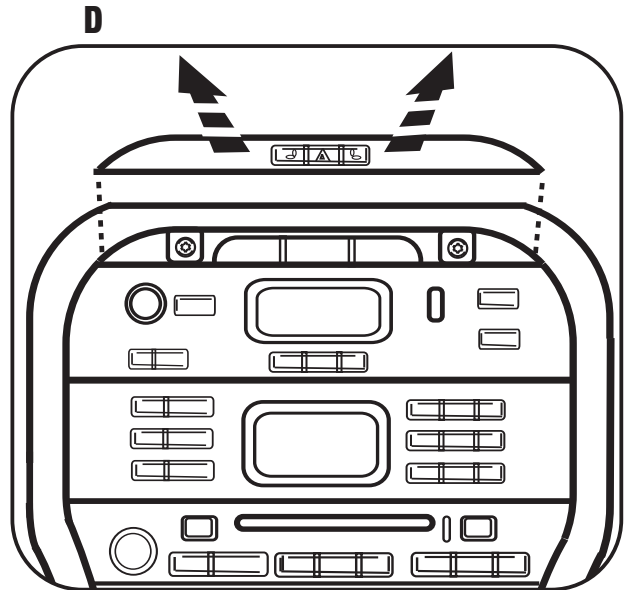

DIN RADIO PROVISION-REMOVABLE POCKET


JAGUAR S-TYPE 2003-06/X-TYPE 2002-07

Note: Refer also to the instructions included with the aftermarket radio.


- 1** Mount the factory climate controls assembly to the radio housing. (Figure A)
- 2** Slide the DIN cage into the bottom of the Radio Housing and secure by bending the metal locking tabs outward. (Figure B)
- 3** Slide the aftermarket radio into the cage until it snaps into place. (Figure C)
- 4** Snap the pocket into the top of the radio housing. (Figure D)

Continue to final assembly.


A

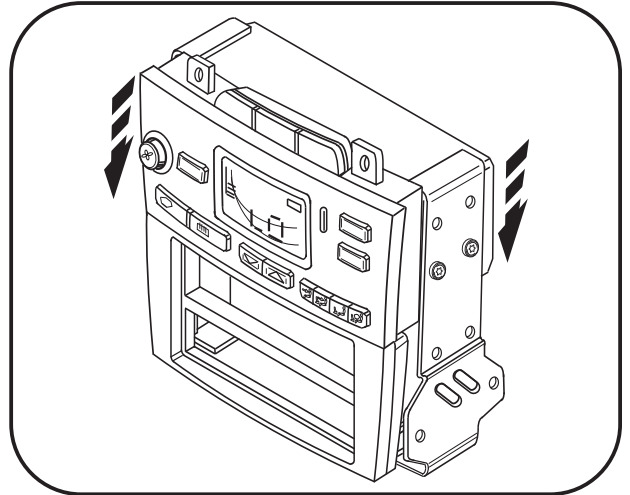

B

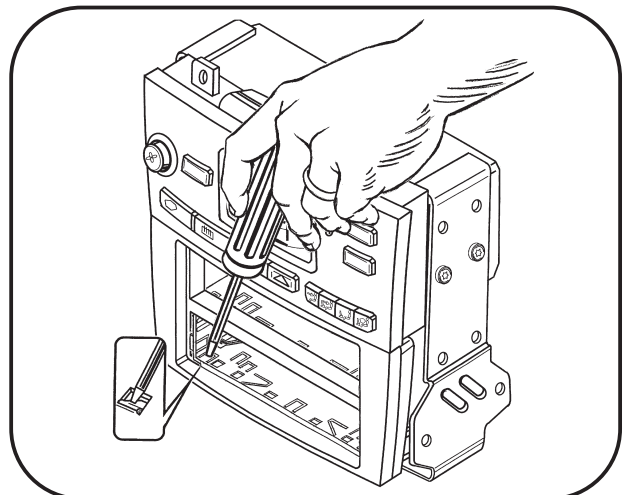

C

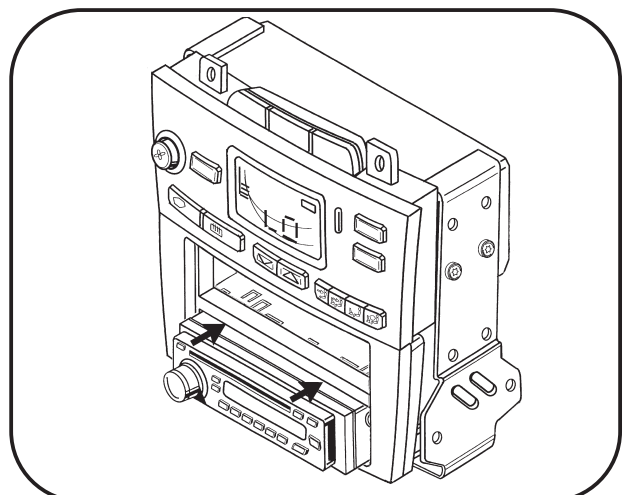

D

